


# Coldwatcher



Model MPH1000 and MPH500

Compact, durable heaters purpose designed for reliable frost protection. Suited to a wide range of applications including lofts, sheds, greenhouses and conservatories.

### Dimensions and clearances (mm)

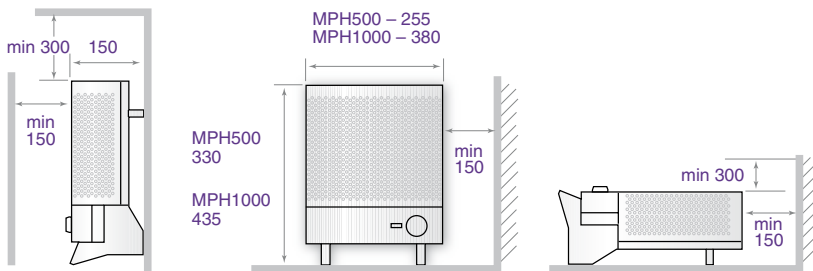

### Features

- Energy saving thermostatic control with frost protection.
- Professionally tested against the British Standard for frost protection.
- 500W (MPH500) or 1000W (MPH1000) output.
- Safe for use in wet areas (IPX4).
- Freestanding or wall mounting.
- Neon mains indicator.
- 1.8m cable and plug supplied as standard.

### Technical information

#### Colour/finish

Willow white and birch grey trim.

#### Construction

- Rugged and long-lasting steel construction.

#### Safety Protection

- Professionally tested for frost protection to BS EN60675:1995.
- Supply interrupt and safety cut-out.



ECOT range

The Dimplex ECOT range of thermostatic tubular heaters is ideal for applications which require safe, low-wattage background heating for localised frost protection or as window de-misters.

# The ECOT range

### Features

- Thermostatic control.
- Fully splash-proof (IPX4 rated).
- Discrete wall/floor mounting brackets.
- Optional interlinking kit (TTHLK).
- Auto-reset thermal overload cut-out for safety.
- Even heat distribution across heater body.
- Complete with 1.5m of cable and fitted plug.
- White body, grey ends and wall brackets.
- Suitable for connection to time switch.

Model no.	Loading (W)	Height (mm)	Length (mm)	Depth (mm)	Weight (kg)
ECOT1FT	40W	81	408	80	0.5
ECOT2FT	80W	81	713	80	0.6
ECOT3FT	120W	81	1018	80	0.8
ECOT4FT	160W	81	1323	80	1.0
ECOT5FT	200W	81	1630	80	1.1
ECOT6FT	240W	81	1933	80	1.3